



Compaq AlphaStation XP1000

V2.7—1 February 2000

Systems and Options Catalog

Product Description

Compaq AlphaStation XP1000 is available from Compaq Workstation Sales Specialists and through qualified distribution partners. A list of eligible partners is available through the local Compaq Sales Office.

Compaq AlphaStation XP1000 is available as:

- **Configure To Order (CTO) Systems**—designed for “a la carte” ordering and distributor integration. CTO systems contain either an Alpha 21264 (EV6) 500 MHz or an Alpha 21264A (EV67) 667 MHz system kernel, 4 MB Level 2 cache memory, onboard wide-ultra SCSI adapter, and either operating system-less (LINUX ready), or factory installed Windows NT (500 MHz only) or Tru64 UNIX or OpenVMS operating system. CTO systems require a minimum of 128 MB memory, one hard disk drive and a country kit. Selection of a graphics adapter is mandatory for Windows NT CTO systems. All CTO systems require the selection of a country specific keyboard for full system operation.
- **Packaged Systems/Build To Order (BTO) Systems**—designed as complete systems for shipment to end-users. Packaged Systems contain either an Alpha 21264 (EV6) 500 MHz or an Alpha 21264A (EV67) 667 MHz system kernel, 4 MB Level 2 cache, a minimum of 128 MB memory, a minimum 9.1 SCSI disk drive, onboard wide-ultra SCSI adapter, single channel wide ultra-2 SCSI (LVD) adapter (667 MHz systems only), graphics adapter, country kit (for all but European packages) and factory installed Windows NT (500 MHz only), Tru64 UNIX or OpenVMS operating system. All packaged systems include a country kit and country specific keyboard except European packages. Selection of a country kit is mandatory for European systems. Additional options will ship separate and will not be factory integrated into packaged systems.

Compaq AlphaStation XP1000 supports five I/O expansion slots on two buses: two 64-bit PCI, two 32-bit PCI, and one PCI/ISA 32-bit combination slot. The system provides six internal storage device bays, including a floppy diskette, a CD-ROM, two additional 5.25-inch removable media devices, and two 1-inch hard disk drive bays. Onboard options include an UltraSCSI adapter, a 16-bit Soundblaster™ compatible audio (not supported on OpenVMS), and 10/100 Ethernet (Twisted pair) network interface. A maximum of 2 GB of memory is supported in the system enclosure.

Compaq AlphaStation XP1000 come standard with a three-year limited hardware warranty. Year one features on-site service with second day response; years two and three are return to Compaq service, parts only. This warranty represents one of the most comprehensive in the industry.

Compaq and the names of Compaq products referenced herein are either trademarks and/or service marks or registered trademarks and/or service marks of Compaq.

DIGITAL is a Trademark of Compaq Computer Corporation.

Microsoft, Windows, Windows NT, SQL Server, Office and BackOffice are either trademarks or registered trademarks of Microsoft Corporation.

Intel and Pentium are registered trademarks of Intel Corporation.

Other product and company names mentioned herein may be trademarks and/or service marks of their respective owners.

Step 1—Compaq AlphaStation XP1000

Compaq AlphaStation XP1000 includes

Tower enclosure with

- Alpha 21264 (EV6) 500 MHz CPU or Alpha 21264A (EV67) 667 MHz CPU with 64 KB data cache, 64 KB instruction cache and 4 MB Level 2 cache
- Five Expansion slots on two buses
 - Two 64-bit PCI
 - Two 32-bit PCI
 - One PCI/ISA 32-bit combination slot
- Two memory option banks
 - Four DIMM slots per bank
 - Maximum of 2 GB
- Six Storage bays
 - One diskette drive bay
 - One CD-ROM drive bay
 - Two 5.25-inch x 1.6-inch removable media bays
 - Two 3.5-inch x 1.0-inch hard disk drive bays
- 400 W power supply
- Onboard wide UltraSCSI adapter. PCI-based single-channel wide Ultra-2 SCSI (LVD) adapter optional (**included in all 667 MHz packaged systems**)
- Onboard 16-bit Soundblaster™ compatible audio (not supported under OpenVMS)
- Onboard 10/100 Ethernet (Twisted pair) (ThinWire and Thick wire optional)
- Integrated I/O comprising parallel port, two serial ports, audio in, audio out, headphone, microphone, mouse and keyboard ports.
- 1.44 MB diskette drive
- 600 MB 32X CD-ROM drive
- LINUX-ready (no operating system installed) or
- Factory Installed Software : **either**
 - Windows NT 4.0 includes Windows NT (500 MHz)base license, **with Service Pack 3** (or higher) **or**
 - Tru64 UNIX V4.0F (minimum) includes: Tru64 UNIX base license, two-user UNIX license, and COMPAQ'S Open3D license. **or**
 - OpenVMS 7.2-1 includes OpenVMS Systems Value License Package with OpenVMS Alpha base license, OpenVMS 1-user license, NAS Client 150.

Step 1a—Configure To Order Systems

- **Mandatory** components required for CTO systems.
- Minimum of 128 MB memory
- One hard disk drive
- Country Kit
- Selection of a graphics adapter is **mandatory** for Windows NT CTO (500 MHz)
- Selection of a graphics adapter is optional for OpenVMS, LINUX-ready, Tru64 UNIX.
- All CTO systems require a country specific keyboard. Selection of a keyboard is not mandatory but is essential for full system operation.
- Additional components in Steps 3 through 11 are optional and will be factory integrated when ordered with a CTO model.

Windows NT 4.0—CTO Systems (500 MHz)

Order Number	CPU	Memory / Cache	Graphics	Hard Disk Drive	Country Kit
SN-E2F6W-V2	500	Mandatory / 4 MB	Mandatory	Mandatory	Mandatory

Tru64 UNIX—CTO Systems (500 MHz and 667 MHz)

Order Number	CPU	Memory / Cache	Graphics	Hard Disk Drive	Country Kit
SN-E2F6W-32	500	Mandatory / 4 MB	Optional	Mandatory	Mandatory
SN-E2G6W-32	667	Mandatory / 4 MB	Optional	Mandatory	Mandatory

OpenVMS—CTO Systems (500 MHz and 667 MHz)

Order Number	CPU	Memory / Cache	Graphics	Hard Disk Drive	Country Kit
SN-E2F6W-A4	500	Mandatory / 4 MB	Optional	Mandatory	Mandatory
SN-E2G6W-A4	667	Mandatory / 4 MB	Optional	Mandatory	Mandatory

Step 1a—Configure To Order Systems (continued)**No OS (LINUX-ready)—CTO Systems (500 MHz and 667 MHz)**

Order Number	CPU	Memory / Cache	Graphics	Hard Disk Drive	Country Kit
SN-E2F6W-L2	500	Mandatory/4MB	Optional	Mandatory	Mandatory
SN-E2G6W-L2	667	Mandatory/4MB	Optional	Mandatory	Mandatory

Step 1b—Packaged Systems/BTO Systems

- All packaged systems include a country kit and country specific keyboard except European packages
- Selection of country Kit from step 2 is mandatory for European packages.
 - Single-channel wide Ultra-2 SCSI (LVD) adapter (SN-KZPCA-AA) installed (one PCI-slot) in all 667 MHz packaged systems.
- **Additional options will not be factory integrated into packaged systems and will ship as spares.**

Tru64 UNIX—Packaged Systems/BTO Systems(500 MHz)

Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	US Ctry Kit/Kbd
SN-E2F6Q-AA	128 MB / 4 MB	ELSA Gloria Synergy	4.3 GB SCSI disk	Inc (SN-LKQ47-AA)
SN-E2F6Q-AB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Inc (SN-LKQ47-AA)
SN-E2F6Q-AC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Inc (SN-LKQ47-AA)
Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Eur Ctry Kit/Kbd
SN-E2F6Q-EA	128 MB / 4 MB	ELSA Gloria Synergy	4.3 GB SCSI disk	Mandatory
SN-E2F6Q-EB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Mandatory
SN-E2F6Q-EC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Mandatory
Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Japan Ctry Kit/Kbd
SN-E2F6Q-JA	128 MB / 4 MB	ELSA Gloria Synergy	4.3 GB SCSI disk	Inc (SN-LKQ97-AJ)
SN-E2F6Q-JB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Inc (SN-LKQ97-AJ)
SN-E2F6Q-JC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Inc (SN-LKQ97-AJ)
Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Japan/Eng Ctry Kit/Kbd
SN-E2F6Q-HA	128 MB / 4 MB	ELSA Gloria Synergy	4.3 GB SCSI disk	Inc (SN-LKQ47-AA)
SN-E2F6Q-HB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Inc (SN-LKQ47-AA)
SN-E2F6Q-HC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Inc (SN-LKQ47-AA)
Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Chinese Ctry Kit/Kbd
SN-E2F6Q-CA	128 MB / 4 MB	ELSA Gloria Synergy	4.3 GB SCSI disk	Inc (SN-LKQ47-CV)
SN-E2F6Q-CB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Inc (SN-LKQ47-CV)
SN-E2F6Q-CC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Inc (SN-LKQ47-CV)

Tru64 UNIX—Packaged Systems/BTO Systems (667 MHz)

Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	US Ctry Kit/Kbd
SN-E2G6Q-AA	256 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Inc (SN-LKQ47-AA)
SN-E2G6Q-AB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Inc (SN-LKQ47-AA)
SN-E2G6Q-AC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Inc (SN-LKQ47-AA)
Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Eur Ctry Kit/Kbd
SN-E2G6Q-EA	256 MB / 4 MB	ELSA Gloria Synergy	9.1GB SCSI disk	Mandatory
SN-E2G6Q-EB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Mandatory
SN-E2G6Q-EC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Mandatory

Tru64 UNIX—Packaged Systems/BTO Systems (667 MHz) (continued)

Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Japan Ctry Kit/Kbd
SN-E2G6Q-JA	256 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Inc (SN-LKQ97-AJ)
SN-E2G6Q-JB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Inc (SN-LKQ97-AJ)
SN-E2G6Q-JC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Inc (SN-LKQ97-AJ)
Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Japan/Eng Ctry Kit/Kbd
SN-E2G6Q-HA	256 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Inc (SN-LKQ47-AA)
SN-E2G6Q-HB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Inc (SN-LKQ47-AA)
SN-E2G6Q-HC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI disk	Inc (SN-LKQ47-AA)
Order Number	Memory / Cache	Graphics	10K RPM HardDisk	Chinese Ctry Kit/Kbd
SN-E2G6Q-CA	256 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Inc (SN-LKQ47-CV)
SN-E2G6Q-CB	256 MB / 4 MB	PowerStorm 300	9.1 GB SCSI disk	Inc (SN-LKQ47-CV)
SN-E2G6Q-CC	256 MB / 4 MB	PowerStorm 350	9.1 GB SCSI Disk	Inc (SN-LKQ47-CV)

OpenVMS—Packaged Systems/BTO Systems (500 MHz)

Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Country Kit/Kbd
SN-E2F6Q-VD	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	US Inc (LK461-A2)
SN-E2F6Q-ED	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	European Mandatory
SN-E2F6Q-JD	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Japan Inc (SN-LKQ97-AJ)
SN-E2F6Q-HD	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Jpn/Eng Inc (LK461-A2)
SN-E2F6Q-CD	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Chin Inc (SN-LKQ47-CV)

OpenVMS—Packaged Systems/BTO Systems (667 MHz)

Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Country Kit/Kbd
SN-E2G6Q-VD	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	US Inc (LK461-A2)
SN-E2G6Q-ED	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	European Mandatory
SN-E2G6Q-JD	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Japan Inc (SN-LKQ97-AJ)
SN-E2G6Q-HD	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Jpn/Eng Inc (LK461-A2)
SN-E2G6Q-CD	128 MB / 4 MB	ELSA Gloria Synergy	9.1 GB SCSI disk	Chin Inc (SN-LKQ47-CV)

No OS (LINUX-ready)—Packaged Systems/BTO Systems (500 MHz)

Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Country Kit/Kbd
SN-E2F6Q-VL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	US Inc (SN-LKQ47-AA)
SN-E2F6Q-EL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	European Mandatory
SN-E2F6Q-JL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	Japan Inc (SN-LKQ97-AJ)
SN-E2F6Q-HL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	Jpn/E Inc(SN-LKQ47-AA)
SN-E2F6Q-CL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	Chin Inc (SN-LKQ47-CV)

No OS (LINUX-ready)—Packaged Systems/BTO Systems (667 MHz)

Order Number	Memory / Cache	Graphics	10K RPM Hard Disk	Country Kit /Kbd
SN-E2G6Q-VL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	US Inc (SN-LKQ47-AA)
SN-E2G6Q-EL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	European mandatory
SN-E2G6Q-JL	256 MB / 4 MB	Optional	9.1 GB SCSI Disk	Japan Inc (SN-LKQ97-AJ)
SN-E2G6Q-HL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	Jpn/E Inc(SN-LKQ47-AA)
SN-E2G6Q-CL	256 MB / 4 MB	Optional	9.1 GB SCSI disk	Chin Inc (SN-LKQ47-CV)

Step 2—Country Kit

- LINUX-ready, Tru64 UNIX or OpenVMS universal country kits include two country-specific power cords and mouse. multi-lingual user documentation is shipped with systems kernel. Tru64 UNIX license is included with associated CTO systems and packaged systems.
- Windows NT country kits include two country-specific power cords, mouse, operating system license, media and Microsoft Windows NT documentation.
- The following Factory Installed Software (FIS) languages are the only languages delivered:
 - English, Japanese, French, Italian, German, Spanish and Dutch.
 - Additional Windows NT languages may be purchased directly from Microsoft.
 - Country kit is required for system to be operational.
 - Only one country kit is allowed per system.
 - Bulk system orders must include country kits equal to the total number of systems ordered.

Country Supported	Windows NT 4.0 Country Kits	Windows NT 4.0 Media Language	LINUX-ready, Tru64 UNIX 4.0F or OpenVMS Country Kits	FIS and Documentation Language Supported
Americas				
United States	SN-PBB0P-AA	English	SN-PBB0U-AA	English
Canada	SN-PBB0P-AC	French	SN-PBB0U-AC	French
Denmark	SN-PBB0P-AD	Danish	SN-PBB0U-AD	English
Finland	SN-PBB0P-AF	Finish	SN-PBB0U-AF	English
Norway	SN-PBB0P-AN	Norwegian	SN-PBB0U-AN	English
Sweden	SN-PBB0P-AM	Swedish	SN-PBB0U-AM	English
Germany	SN-PBB0P-AG	German	SN-PBB0U-AG	German
Netherlands	SN-PBB0P-AH	Dutch	SN-PBB0U-AH	Dutch
Italy	SN-PBB0P-AI	Italian	SN-PBB0U-AI	Italian
Switzerland/French	SN-PBB0P-AK	French	SN-PBB0U-AK	French
Switzerland/Germany	SN-PBB0P-AL	German	SN-PBB0U-AL	German
Switzerland/Italian	SN-PBB0P-AW	Italian	SN-PBB0U-AW	Italian
Switzerland/English	SN-PBB0P-CH	English	SN-PBB0U-CH	English
France, Belgium	SN-PBB0P-AP	French	SN-PBB0U-AP	French
Spain	SN-PBB0P-AS	Spanish	SN-PBB0U-AS	Spanish
United Kingdom	SN-PBB0P-AE	English	SN-PBB0U-AE	English
General European	SN-PBB0P-EC	English	SN-PBB0U-EC	English
Asia Pacific				
Japan	SN-PBB0P-AJ	Japanese	SN-PBB0U-AJ	Japanese
Japan	SN-PBB0P-CC	English	SN-PBB0U-CC	English
Chinese/General Asia	SN-PBB0P-CA	English	SN-PBB0U-CA	English
Chinese	SN-PBB0P-CV	Simplified Chinese	SN-PBB0U-CV	Simplified Chinese
Australia/New Zealand	SN-PBB0P-CN	English	SN-PBB0U-CN	English

Step 3—Keyboards

- Non-European BTO systems include keyboard; CTO systems and European BTO systems do not include keyboard. Selection of a keyboard is not mandatory but is essential for full system operation.
- Keyboards listed below are colored to match CPU and monitor. Alternative keyboards purchased through distribution channels may not be the correct color matches.

Windows NT Keyboard	LINUX-ready or Tru64 UNIX Keyboard	OpenVMS Keyboard	Country
Americas			
SN-LKQ97-AA	SN-LKQ47-AA	LK461-A2	US/English
SN-LKQ97-AC	SN-LKQ47-AC	LK461-AC	Canada/French
—	—	LK461-AQ	Canada/English
SN-LKQ97-AR	SN-LKQ47-AR	—	Latin-American/Spanish
SN-LKQ97-AU	—	—	Brazil
Europe			
SN-LKQ97-AB	SN-LKQ47-AB	LK461-AB	Belgian
SN-LKQ97-AD	SN-LKQ47-AD	LK461-AD	Danish
SN-LKQ97-AE	SN-LKQ47-AE	—	UK
SN-LKQ97-AF	SN-LKQ47-AF	LK461-AF	Finland
SN-LKQ97-AG	SN-LKQ47-AG	LK461-AG	German
SN-LKQ97-AH	SN-LKQ47-AH	LK461-AH	Netherlands
SN-LKQ97-AI	SN-LKQ47-AI	LK461-AI	Italy
SN-LKQ97-AK	SN-LKQ47-AK	LK461-AK	Switzerland/French
—	—	LK461-AL	Switzerland/German
SN-LKQ97-AM	SN-LKQ47-AM	LK461-AM	Sweden
SN-LKQ97-AN	SN-LKQ47-AN	LK461-AN	Norway
SN-LKQ97-AP	SN-LKQ47-AP	LK461-AP	France
SN-LKQ97-AS	SN-LKQ47-AS	LK461-AS	Spain
SN-LKQ97-AT	SN-LKQ97-AT	LK461-AT	Hebrew
SN-LKQ97-AV	SN-LKQ97-AV	LK461-AV	Portugal
SN-LKQ97-AX	SN-LKQ97-AX	—	Bosnia, Herzegovina, Croatia, Serbia, Yugoslavia
SN-LKQ97-BH	SN-LKQ47-BH	LK461-BH	Greece
—	—	LK461-BL	Romania
SN-LKQ97-BP	SN-LKQ47-BP	LK461-BP	Poland
SN-LKQ97-BQ	SN-LKQ47-BQ	LK461-BQ	Hungary
SN-LKQ97-BR	SN-LKQ47-BR	—	Arabic
SN-LKQ97-BT	SN-LKQ47-BT	LK461-BT	Russia/Cyrillic
SN-LKQ97-BU	SN-LKQ47-BU	LK461-BU	Turkey
—	—	LK461-BW	Turkey/French
SN-LKQ97-BV	SN-LKQ47-BV	LK461-BV	Czech Republic
—	—	LK461-BY	Yugoslavia
SN-LKQ97-CZ	SN-LKQ47-CZ	LK461-CZ	Slovak
Asia Pacific			
SN-LKQ97-AJ	—	—	Japan
SN-LKQ97-BI	SN-LKQ47-BI	—	Taiwan
SN-LKQ97-CV	SN-LKQ47-CV	—	China
SN-LKQ97-BK	SN-LKQ47-BK	—	South Korean
SN-LKQ97-CB	SN-LKQ47-CB	—	Thailand
SN-LKQ97-BA	SN-LKQ47-BA	—	International

Step 4—Memory

- Selection of a minimum of 128 MB memory is **mandatory** for CTO systems
- Systems support 128 MB to 2 GB system memory (two memory banks support four DIMMs per bank).

SN-MSP01-KA	128 MB ECC memory DIMMs (4 x 32MB DIMMs)
SN-MSP01-KB	256 MB ECC memory DIMMs (4 x 64MB DIMMs)
SN-MSP01-KC	512 MB ECC memory DIMMs (4 x 128MB DIMMs)
SN-MSP01-KD	1024 MB ECC memory DIMMs (4 x 256MB DIMMs)

Step 5—Storage

All systems include an onboard UltraSCSI adapter for internal drives only. 667 MHz Packaged Systems/BTO systems also include a PCI-based Ultra-2 SCSI adapter (one SN-KZPCA-AA/136237-B21 factory installed).

Step 5a—Internal Storage

- CTO systems require one **mandatory** hard disk drive.
- Hard disk drive ordered with Windows NT, Tru64 UNIX or OpenVMS CTO systems includes factory installed software.
- Systems support up to four hard disk drives:
- Two 3.5-inch x 1.0-inch hard disk drives in internal bays.
- Two 3.5-inch x 1.6-inch or 1.0-inch hard disk drives supported in the 5.25-inch removable media bays.

SCSI Disk Drives

SN-PBXRW-SC	9.1 GB Ultra2 LVD Wide SCSI 7200 RPM hard disk drive 1.0 inch drive
SN-PBXRW-TB	18.2 GB Ultra2 LVD Wide SCSI 7200 RPM hard disk drive, 1.0-inch drive
SN-PBXRW-RB	4.3 GB Ultra2 LVD Wide SCSI 10K RPM hard disk drive, 1.0-inch drive
SN-PBXRW-VA	9.1 GB Ultra2 LVD Wide SCSI 10K RPM hard disk drive, 1.0-inch drive
SN-PBXRW-WA ¹	18.2 GB Ultra2 LVD Wide SCSI 10K RPM hard disk drive, 1.6-inch drive (includes fan kit)
SN-PBXRW-WB	18.2 GB Ultra2 LVD Wide SCSI 10K RPM hard disk drive, 1.0-inch drive
SN-PBXRW-XA	36.4 GB Ultra2 LVD Wide SCSI 10K RPM hard disk drive, 1.6-inch drive

1. Maximum one per system, supported in the 5.25-inch removable media bays only.

Removable Media

- Systems include one 5.25-inch 32X CD-ROM drive.
- Systems support two additional 5.25-inch removable media devices. Note: 5.25-inch removable media bays also support hard disk drives.
- Systems support an additional ATAPI device.
- DVD-ROM is data support only (no MPEG-2 capability)
- DVD-ROM is backward compatible with CD-ROM media.

3X-SD20X-AA	20/40 GB 4 mm DAT Ultra 2 (LVD) SCSI Internal Tape Drive
3X-SZ50X-AA	50/100 GB 8 mm AIT Ultra 2 (LVD) SCSI Internal Tape Drive
SN-PBXTA-AA	35/70 GB 8 mm AIT Wide SCSI Internal Tape Drive
SN-TLZ10-LK	12/24 GB 4 mm DAT internal SCSI tape drive, 1.6-inch front accessible bay
SN-TLZ09-LK	4/8 GB 4 mm DAT internal SCSI tape drive, 1.6-inch front accessible bay
SN-PBXRX-CA	100MB ATAPI ZIP Drive
SN-PBXRV-AA	6X/32X ATAPI DVD-ROM Drive (Data device only)

Step 5b—External Storage

An additional SCSI controller is required to support external drives or RAID arrays.

SCSI Controllers

- All Systems include an onboard UltraSCSI controller for internal disks only.
- Systems support a maximum of two additional PCI-based storage adapters or RAID controllers for additional storage.
- 667 MHz systems include an additional PCI-based Wide Ultra-2 SCSI (LVD) adapter (one SN-KZPCA-AA, factory installed) used to improve internal disk performance. Therefore only one additional controller for external disk connection is allowed with these packaged systems.
- Raid configured disk arrays are supported as external configurations only (requires DS-BA356-KF external storageworks unit).

Maximum SCSI Controllers supported per system		Windows NT	Tru64 UNIX	OpenVMS
SN-KZPBA-CA	PCI-based single channel UltraSCSI Single-Ended adapter—requires one PCI slot.	2	2	2
SN-KZPBA-CB	PCI-based single channel UltraSCSI Differential adapter—requires one PCI slot.	2	2	2
SN-KZPAC-AA	PCI-based single channel RAID Array controller (UltraSCSI Single-ended) with 4 MB cache—requires one PCI slot.	1	1	1
SN-KZPAC-CA	PCI-based three channel RAID Array controller (UltraSCSI Single-ended) with 4 MB cache—requires one PCI slot. Note: External use of the third channel requires one additional PCI bulkhead slot and a BN31K-0E SCSI cable/bulkhead assembly kit.	1	1	1
SN-KZPAC-CB	PCI-based three channel RAID Array controller (UltraSCSI Single-ended) with 8 MB cache—requires one PCI slot. Note: External use of the third channel requires one additional PCI bulkhead slot and a BN31K-0E SCSI cable/bulkhead assembly kit.	1	1	1
SN-KZPCA-AA	PCI-based single channel Wide Ultra2 (LVD) adapter —requires one PCI slot.	1	1	1

Expansion Boxes and SCSI cables

DS-BA356-KF	External StorageWorks deskside pedestal unit with 180 W power supply, dual speed blowers, UltraSCSI I/O personality module. Configured for single bus.
BN38C-xx (xx =-01 one meter length, up to -020, 20 meter lengths)	VHDCI male to 68-pin HD male SCSI cable. Required to connect external StorageWorks UltraSCSI pedestal to SN-KZPBA-CA/CB and SN-KZPCA-AA adapters.
BN37A-xx (xx=-01 one meter length, up to -025, 25 meter lengths)	VHDCI male to VHDCI male SCSI cable. Required to connect external StorageWorks UltraSCSI pedestal to SN-KZPAC-AA/CA controller.

Step 6—Graphics Options

- Graphics adapter is mandatory for Windows NT CTO systems.
- Graphics adapter is optional for Tru64 UNIX, LINUX-ready or OpenVMS CTO systems.
- System consists of two PCI buses with three PCI slots on Bus 0 and two PCI slots on Bus 1.
- For optimal graphics performance all graphics adapters should be installed on Bus 0. There will be a loss of performance on any adapter placed on PCI Bus 1.
- The first graphics adapter for single head systems must be installed on PCI Bus 0.
- Multi-head systems must be homogeneous, all ELSA GLoria Synergy or all PowerStorm 300, etc.
- Windows NT graphics options include Graphics Support Services Software license, media and documentation.
- Tru64 UNIX and OpenVMS graphics options require DIGITAL Open3D media, included in factory installed software (FIS).
- Customers installing LINUX must refer to their LINUX supplier for graphic adapter support.

Maximum Graphics Adapters supported per system		Windows NT	Tru64 UNIX	OpenVMS
SN-PBXGK-BB	ELSA GLoria Synergy graphics with 8 MB SGRAM. TrueColor at 1280 x1024	1/3 ¹	4 ¹	4 ¹
SN-PBXGD-AD	PowerStorm 300 Midrange 3D graphics with 15MB framebuffer memory and 16MB texture memory TrueColor at 1280 x1024	2	1 ²	—
SN-PBXGD-AE³	PowerStorm 350 Midrange 3D graphics with 30 MB framebuffer memory and 32 MB texture memory TrueColor at 1900 x1200	2	1 ²	—

- ELSA GLoria Synergy: Windows NT supports one head for 2D/3D, two or three heads for 2D only. Tru64 UNIX and OpenVMS support one to three heads for 2D only.
- Updates on multi-head support can be located at <http://www1.service.digital.com/open3d>.
- Powerstorm 350 customers requiring to display the highest resolution stereo graphics (1280x1024 @ 120Hz) should consider the Viewsonic P817 monitor as their current monitor solution.

Step 7—Color Monitors

Note: Country Kit includes two country-specific power cords, one for system and one for monitor.

3R-VRQP7-24 3R-VRQP7-23	P700 MONITOR, 23 =Southern hemisphere, -24 = Northern hemisphere 17" (16" viewable image size) professional series auto-scanning color monitor, Flat Definition Trinitron CRT, 0.25 mm aperture grill pitch, VGA to 1280 x 1024 at 75 Hz, TCO 99, MPR-II, Energy Star, attached 1.8-m video cable; without power cord
3R-VRQP9-24 3R-VRQP9-23	P900 MONITOR , 23 =Southern hemisphere, -24 = Northern hemisphere 19" (18" viewable image size) professional series auto-scanning color monitor, Flat Definition Trinitron CRT, 0.25 mm aperture grill pitch, VGA to 1280 x 1024 at 75 Hz, TCO 99, MPR-II, Energy Star, attached 1.8-m video cable; without power cord
3R-VRQP1-24 3R-VRQP1-23	P1100 MONITOR, 23 =Southern hemisphere, -24 = Northern hemisphere 21" (19.6" viewable image size) auto-scanning color monitor, Trinitron CRT, 0.28 mm aperture grill pitch, VGA to 1600 x 1200 at 85 Hz NI, TCO 99, Energy Star, includes 1.8-m video cable; without power cord
3R-A0297-AA	P1610 COLOR MONITOR, NH P1610 Color Monitor -- 24" Trinitron monitor (22.5" viewable image size), 0.25-0.28mm variable aperture grille pitch, up to 1920 x 1200 resolution @ 76 Hz, 16:10 aspect ratio, Plug & Play, TCO '95, Colorific Software, Northern Hemisphere, includes video cable. (Note customers requiring 1900 x1200 display resolution requires Powerstorm 350 graphics adapter.)
SN-VRQF8-24	TFT 8000 18" PANEL MONITOR TFT 8000 18" Panel Monitor -- 18" viewable image size, TFT active matrix, in plane switching technology 160 degree viewing angles, 1280 x 1024 resolution, brightness of 165 nits, detachable base. Requires ELSA Gloria Synergy graphics adapter.

Step 8—Network Options

Systems include an onboard 10/100 Ethernet (Twisted pair) controller.

Maximum supported per system		Windows NT	Tru64 UNIX	OpenVMS
SN-PCXAN-DE	XP1 MAU 10Base5 AUI/Thickwire	1	1	1
SN-PCXAN-DF	XP1 MAU CARD 10Base2 Thinwire	1	1	1
DE450-CA	PCI-based Ethernet Card (TW, TP, AUI)	2	2	2
DE500-FA	PCI-based 10/100 MB/s Fast Ethernet, supports fiber MMF (Multi-Mode Fiber)	2	2	2
DE500-BA	PCI-based 10/100 Mb/s Fast Ethernet, supports Twisted pair	2	2	2
3X-DE600-AA	PCI to 10/100 Ethernet NIC 8255x	—	2	2
SN-PBXNP-AC	PCI-based Token Ring adapter This option must be installed in PCI-1 bus for both NT and Unix.	2	2	2
3X-DEFPA-MC	PCI-based FDDI adapter DAS TP-PMD	2	2	2
3X-DEFPA-UC	PCI-based FDDI adapter SAS TP-PMD	2	2	2
3X-DEFPA-AC	PCI-based FDDI adapter SAS MMF, SC	2	2	2
3X-DEFPA-DC	PCI-based FDDI adapter DAS UTP, MMF, SC	2	2	2
PBXDA-AA	PCI-based 4 Port Asynchronous Controller	2	2	2
PBXDA-AB	PCI-based 8 Port Asynchronous Controller	2	2	2
PBXDA-AC	PCI-based 16 Port Asynchronous Controller	2	2	2
PBXDP-AA ¹	PCI-based 2 Port Synchronous Controller	—	2	2
PBXDP-AB ¹	PCI-based 4 Port Synchronous Controller	—	2	2
SN-PBXDP-AC ¹	PCI-based 8 Port Synchronous Controller	—	2	2
DEGPA-SA	Gigabit Ethernet Adapter	1	1	1

1. Select appropriate cable option with synchronous communication cards—BC33x-06.

Step 9—XP1000 Systems 500 and 667 MHz Field Upgrade Option

SN-E2G6W-UG	XP1000/500 hardware CPU upgrade kit to XP 1000/667. Tru64 UNIX, OpenVMS and LINUX-ready only..
-------------	--

Step 10—Hardware Supplemental Services

FM-AWXHW-36	3 Year 5x9 Next Business Day Onsite XP1000/667 warranty uplift (must purchase within 90 days of system purchase).
FM-AW4HR-36	3 Year 5x9 Same Day - 4 Hour Response Onsite XP1000/667 warranty uplift (must purchase within 90 days of system purchase).
FM-AW724-36	3 Year 7x24 Same Day - 4 Hour Response Onsite XP1000/667 warranty uplift (must purchase within 90 days of system purchase).
FS-CPQ05-WJ	In Warranty XP1000/667 service upgrade for 1 st year to 5x9 Next Business Day
FS-CPQ05-WK	In Warranty XP1000/667 service upgrade for 2 nd or 3 rd years to 5x9 Next Business Day
FS-CPQ05-35	Post Warranty XP1000/667 service – 5x9 Next Business Day
FM-AWINS-IN	XP1000/667 Hardware Installation

Step 10a—Software Supplemental Services

For a complete list of available service offerings, please see your local Compaq sales representative or call Compaq directly at 1-800-344-4825 in the US and Canada. For those outside North America, call +353 91 704105 for the number of your local Compaq Information Center.

Windows NT

FM-NMB53-12	12 Month 5 x 9 Bronze Windows NT Software Supplemental Support Services; Tier 3M
FM-NMB53-36	36 Month 5 x 9 Bronze Windows NT Software Supplemental Support Services; Tier 3M
FM-NMB53-60	60 Month 5 x 9 Bronze Windows NT Software Supplemental Support Services; Tier 3M
FM-NMB73-12	12 Month 7 x 24 Bronze Windows NT Software Supplemental Support Services; Tier 3M
FM-NMB73-36	36 Month 7 x 24 Bronze Windows NT Software Supplemental Support Services; Tier 3M
FM-NMB73-60	36 Month 7 x 24 Bronze Windows NT Software Supplemental Support Services; Tier 3M

Tru64 UNIX

FM-3BUNS-12	12 Month 7 x 24 Bronze Software Supplemental Support Services
FM-3BUNS-36	36 Month 7 x 24 Bronze Software Supplemental Support Services
FM-3BUNS-60	60 Month 7 x 24 Bronze Software Supplemental Support Services
FM-3BUN5-12	12 Month 5 x 9 Bronze Software Supplemental Support Services
FM-3BUN5-36	36 Month 5 x 9 Bronze Software Supplemental Support Services
FM-3BUN5-60	60 Month 5 x 9 Bronze Software Supplemental Support Services

Step 11—Media and Documentation
XP1000 User Documentation

EK-XP100-SI	Compaq AlphaStation XP1000 Installation and Setup Guide in seven languages—English, French, German, Japanese, Spanish, Italian, Dutch
EK-CPWXP-TI	Compaq AlphaStation XP1000 Technical Information Guide – English only
QA-6G3AA-G8	XP1000 Service Guide (CD-ROM)

Tru64 UNIX User Documentation, Media and Optional Licenses

For a complete list of available layered Tru64 UNIX software products see the *Software Price List for Digital Products and Services* document available from your local Compaq sales representative or call Compaq at 1-800-344-4825 in the US and Canada. For those outside North America, call +353 91 704105 for the number of your local Compaq Information Center.

QA-MT4AA-H8	Tru64 UNIX Media & Documentation kit
QA-MT4AA-GZ	Tru64 UNIX Full Documentation kit
QA-MT4AB-GZ	Tru64 UNIX End-User Documentation kit
QL-MT7AE-AA	Tru64 UNIX Unlimited User License

OpenVMS

Software Processor Code = E

OpenVMS systems include an OpenVMS Alpha base license, OpenVMS 1 Concurrent Use license, NAS Client 150 Traditional License, MMS Runtime License and Open 3D for Open VMS License. NAS 150 enables the following OpenVMS Software Products: DECwindows Motif, DECnet End System, DECnet/OSI End Node, TCP/IP Client and OpenVMS Cluster Client software.

OpenVMS Media and Documentation—required for first system on site

QA-MT1AT-H8	OpenVMS V7.2-1 Media on CD-ROM
QA-MT1AR-H8	OpenVMS V7.2-1 Media on CD-ROM
QA-MT1AA-H8	OpenVMS V7.1-2 media and on-line documentation on CD-ROM
QA-001AA-GZ	OpenVMS hardcopy documentation

OpenVMS Layered Products CD-ROM

QA-03XAA-H8	Layered products media and documentation for OpenVMS on CD-ROM
-------------	--

DIGITAL Open3D for OpenVMS CD-ROM

QA-0ADAA-H8	DIGITAL Open3D for OpenVMS on CD-ROM, includes graphics drivers
-------------	---

OpenVMS Concurrent Use Licenses

OpenVMS Concurrent Use Licenses are not specific to a single system and can be moved between systems at user discretion. OpenVMS Concurrent Use Licenses can also be shared in a mixed OpenVMS VAX and OpenVMS Alpha Cluster. The OpenVMS traditional unlimited use license is system specific and can only be used on one single system at a time. It can not be shared between systems or in an OpenVMS VAX or OpenVMS Alpha Cluster.


QL-MT3AA-3B	OpenVMS Concurrent Use 1-user license
QL-MT3AA-3C	OpenVMS Concurrent Use 2-user license
QL-MT3AA-3D	OpenVMS Concurrent Use 4-user license
QL-MT3AA-3E	OpenVMS Concurrent Use 8-user license
QL-MT3AA-3F	OpenVMS Concurrent Use 16-user license
QL-MT3AA-3G	OpenVMS Concurrent Use 32-user license
QL-MT3AA-3H	OpenVMS Concurrent Use 64-user license
QL-MT3AA-3J	OpenVMS Concurrent Use 128-user license
QL-MT3AA-3K	OpenVMS Concurrent Use 256-user license
QL-MT2AE-AA	OpenVMS traditional unlimited user license

Compaq AlphaStation XP1000

Specifications

Height	40.64 cm (16 inches)
Width	21.59 cm (8.5 inches)
Depth	44.45 cm (17.5 inches)
Weight	18.6 kg (41 lbs)
Shipping carton	23.38 x 20.50 x 15.36
Shipping weight	22.2 kg (49 lbs)

Compaq AlphaStation XP1000 System Diagram

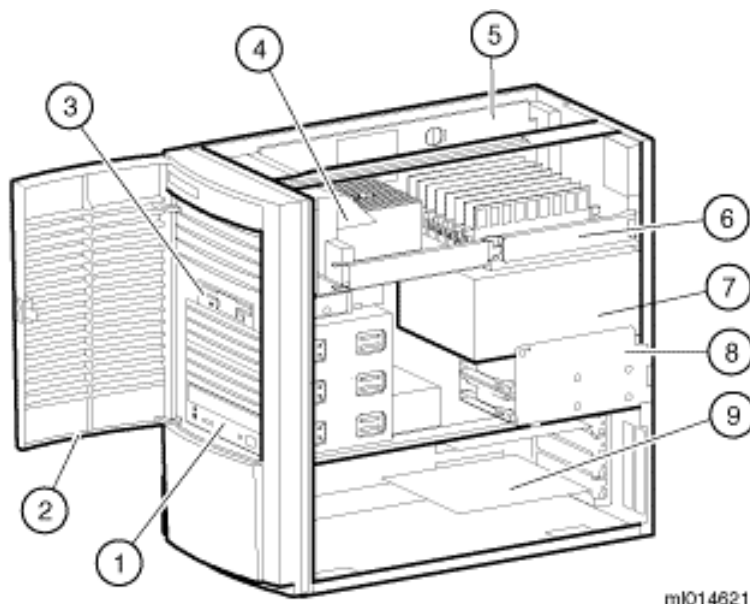

Inside View Description

1. CD-ROM drive.
2. Front door.
3. Floppy drive.
4. Fan pipe (directs air to CPU heat sink area).
5. Main Logic Board (MLB).
6. CPU daughter card.
7. 400 Watt power supply.
8. Internal drive bay cage.
9. PCI option installed.